

# DIY unpowered uniform drip irrigation on sloping land



Dripper assembly with 20 drippers

Bernie Omodei  
Measured Irrigation  
5/50 Harvey Street East, Woodville Park SA 5011  
Mobile 0403 935277  
Email [bomodei@measuredirrigation.com.au](mailto:bomodei@measuredirrigation.com.au)  
Website [www.measuredirrigation.com.au](http://www.measuredirrigation.com.au)

October 2021

## Contents

1.	Introduction	page 2
2.	Schematic diagram	page 3
2.	Installation	page 4
3.	Recommended drippers	page 6
4.	Examples	page 8
5.	Installation cost	page 12
Appendix:	Emitter discharge exponent	page 13

## 1. Introduction

This publication is designed to assist smallholders to install a state of the art irrigation system on sloping or uneven land at an affordable cost. Most drip irrigation applications on sloping land use PC (pressure compensated) drippers. A high pressure pump is usually required to ensure that all drippers within each zone are within the pressure range recommended by the manufacturer for pressure compensation. Furthermore, many zones are usually required to ensure that the drippers within each zone are within the pressure range recommended by the manufacturer for pressure compensation.

All of the above requirements for PC drippers make drip irrigation on sloping land from a header tank (or elevated water supply) very expensive.

This publication demonstrates how drip irrigation on sloping land from a header tank (or using mains pressure) can use NPC (non pressure compensated) drippers without compromising irrigation uniformity. It is assumed that the same drippers are used throughout the irrigation application. The irrigation controller is an [Unpowered Terracotta Irrigation Controller](#).


Some key features are listed below.

1. The installation cost is a fraction of the cost of an equivalent PC system.
2. Excluding the refilling of the header tank, the irrigation system is completely unpowered (no batteries, no solar panels, no electronics, no computers, and no WiFi).
3. A small low pressure water transfer pump may be required to refill the header tank between irrigation events.
4. Provided that the irrigation system is designed so that frictional head loss along each lateral is negligible, then a desired irrigation uniformity for the entire irrigation system can be achieved.
5. Provided that the control dripper on the Unpowered Terracotta Irrigation Controller has the same emitter discharge exponent as the irrigation drippers, the water discharged from each irrigation dripper during the irrigation event is independent of pressure.
6. You can adjust the water usage rate by adjusting the control dripper on the Unpowered Terracotta Irrigation Controller.
7. You can adjust the interval between irrigation events by adjusting the float on the Unpowered Terracotta Irrigation Controller.
8. The irrigation system responds automatically to on-site evaporation and rainfall.
9. Simple, unpowered, and low tech, and therefore fewer things can go wrong.
10. Provided that you have a continuous water supply, you can leave your irrigation application unattended for weeks on end.

The irrigation method described in this publication will be referred to as the **Omodei method**. The theoretical justification for the claims made about the Omodei method will be presented elsewhere.

The Unpowered Terracotta Irrigation Controller incorporates a small valve with a half inch inlet and outlet. The size of the irrigation zone is limited by the size of the valve. For large irrigation applications, the Terracotta Irrigation Controller for Latching Solenoids should be used.

## 2. Schematic diagram

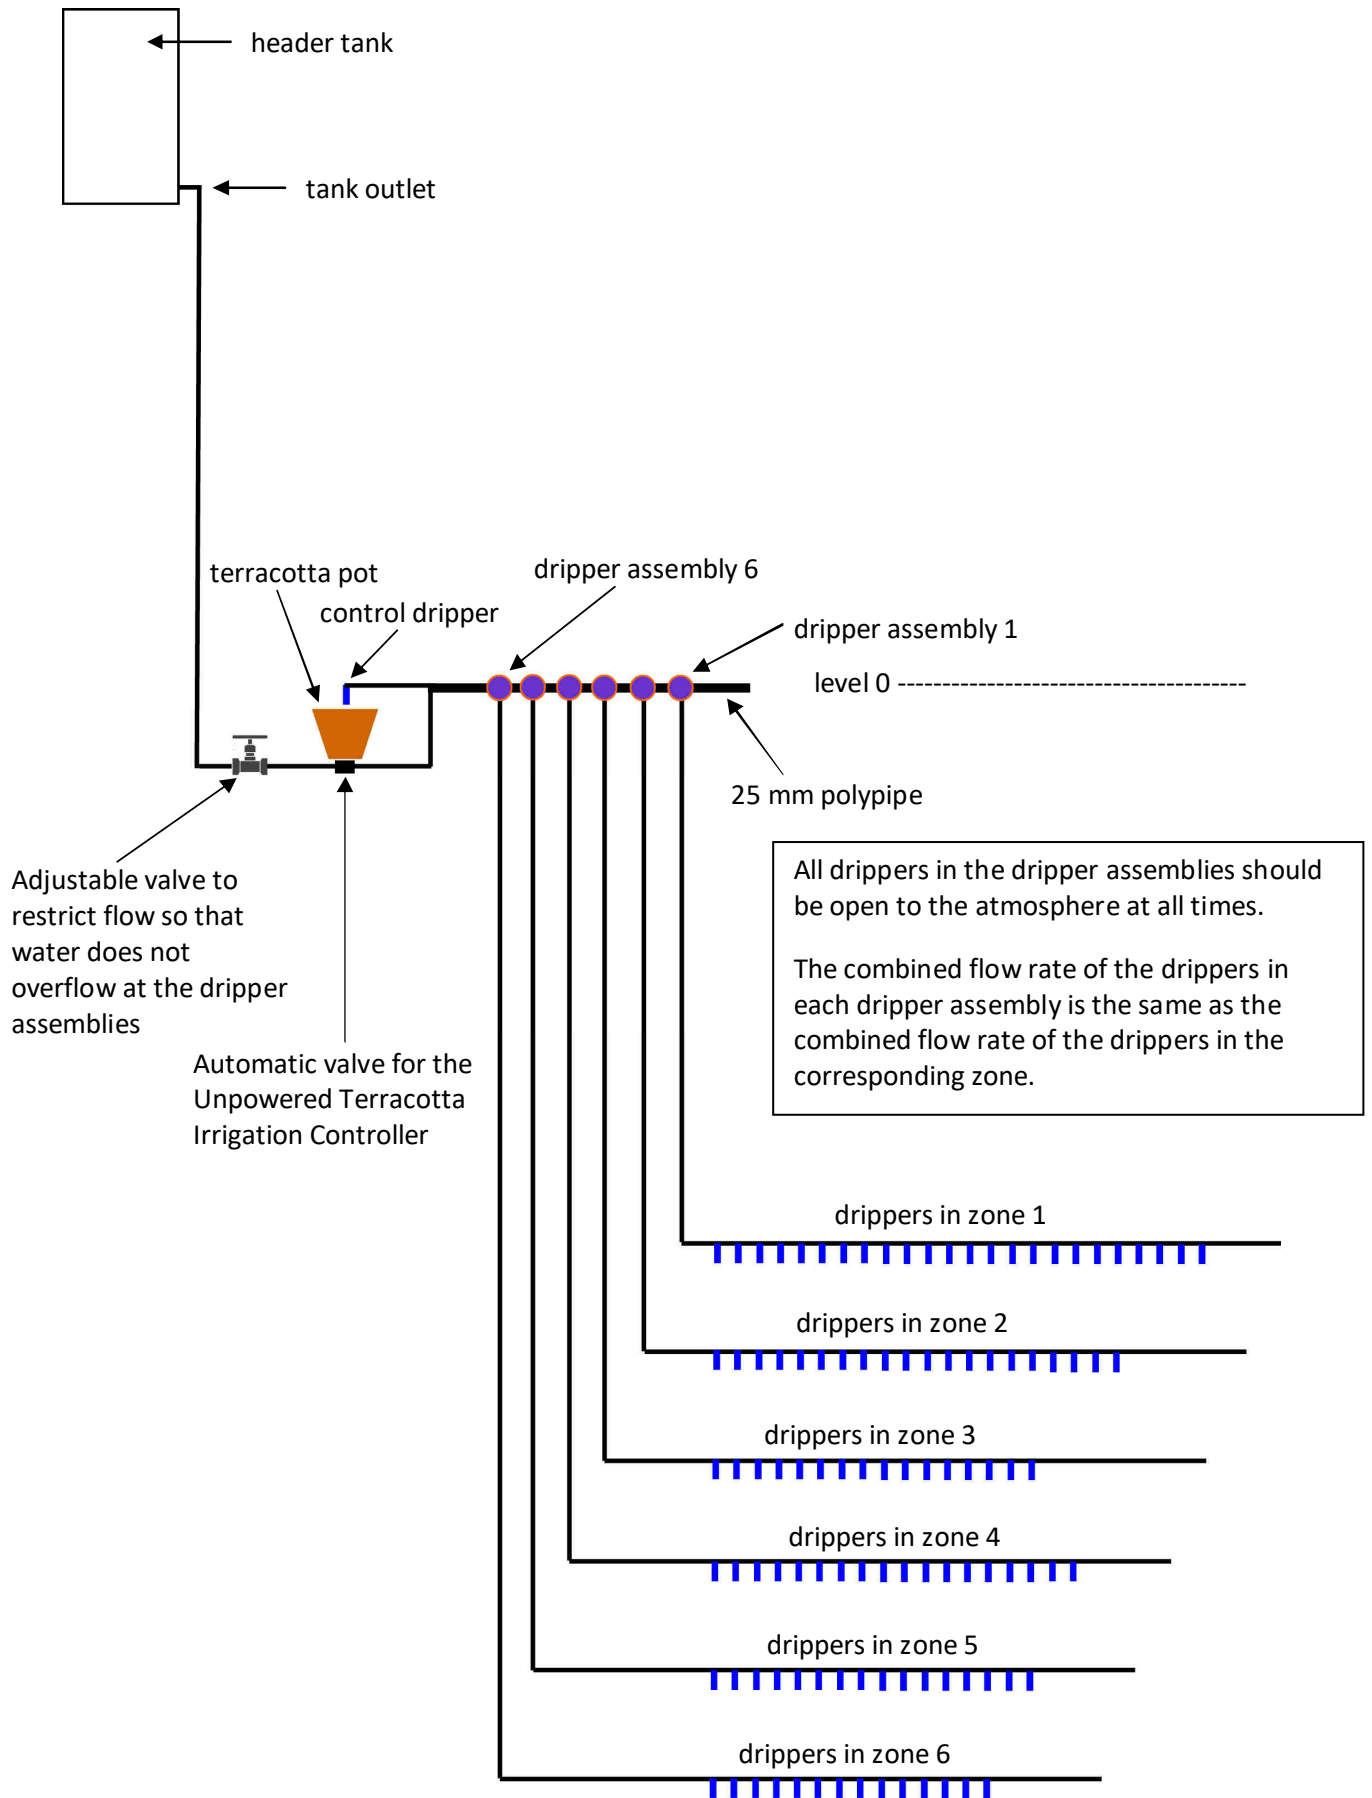

### 3. Installation

Step 1. Arrange laterals so that each lateral follows a different contour level. Use enough laterals so that every plant is at approximately the same level as one of the laterals. The laterals may be NPC dripline or 19 mm polypipe with online NPC drippers. Restrict the length of the laterals so that frictional head loss along the laterals is negligible.

Step 2 (using a header tank). Connect the header tank outlet to the inlet of an Unpowered Terracotta Irrigation Controller so the height of the lowest operational water level above the control dripper is about the same as the height of the control dripper above the highest lateral. Connect the outlet from the irrigation controller to a horizontal length of 25 mm polypipe at the same level as the control dripper (this level is called level 0).

Step 2 (using mains pressure). Connect mains pressure water supply to the inlet of an Unpowered Terracotta Irrigation Controller (for maximum irrigation uniformity the control dripper should be as high as possible). Connect the outlet from the irrigation controller to a horizontal length of 25 mm polypipe at the same level as the control dripper (this level is called level 0).

Step 3. Let  $h$  be the height of the 25 mm polypipe above the highest lateral, let  $P$  be the desired irrigation uniformity (95% for example), and let  $C$  be the manufacturer's coefficient of variation for the drippers.

Subdivide the slope (or uneven land) into zones as follows:

Zone 1 ( $Z_1$ ) is from level  $(-h)$  to level  $(-h) \cdot F$  where  $F = 1/(P+C)^2$

Zone 2 ( $Z_2$ ) is from level  $(-h) \cdot (1.1)$  to level  $(-h) \cdot F^2$

Zone 3 ( $Z_3$ ) is from level  $(-h) \cdot (1.1)^2$  to level  $(-h) \cdot F^3$

and so on until all the laterals have been allocated to a zone. If the land is sufficiently level only one zone may be required.

If  $P = 0.95$  and  $C = 0.01$  then  $F = 1.085$

If  $P = 0.95$  and  $C = 0.02$  then  $F = 1.068$

If  $P = 0.90$  and  $C = 0.03$  then  $F = 1.156$

Alternative Step 3. To achieve maximum irrigation uniformity, do the planting in rows so that each row (or swale) follows a contour level. The laterals for the zone should be at the same level as the row.

Step 4. For each zone  $Z_i$  count the number of irrigation drippers  $N_i$  in the zone. Construct a dripper assembly using drippers with the same emitter discharge exponent (see Appendix) as the irrigation drippers. The flow rate of the dripper assembly should be the same as the combined flow rate of the corresponding drippers in the zone. Attach the dripper assembly to the 25 mm polypipe in Step 2 so that all the drippers in the dripper assembly are at level 0.

Step 5. Polypipe can be used to deliver water from each dripper assembly to the laterals in the corresponding zone. The diameter of the polypipe will depend on the slope of the land. For example, on steep sloping land 13 mm polypipe can be used. The drippers in the dripper assembly should be open to the atmosphere at all times (in other words, the dripper outlets should be at atmospheric pressure). If water starts overflowing near any of the dripper assemblies, you will need to use an adjustable valve on the inlet side of the Unpowered Terracotta Irrigation Controller to restrict the flow just enough to stop the overflow.

To minimise frictional head loss along very long laterals you may need to deliver water from the dripper assembly to 3 points on the lateral, namely, at one sixth of the way, at half way, and at five sixths of the way.

Provided that the irrigation system is designed so that frictional head loss along each lateral is negligible, then the desired irrigation uniformity for the entire irrigation system should be achieved. The irrigation uniformity can be further improved by increasing the number of zones.

There is no upper limit on the vertical gap between the dripper assembly and the irrigation drippers (for example, the irrigation drippers may be 50 metres lower than the dripper assembly).

If you want the water discharged by each irrigation dripper during the irrigation event to be independent of pressure, replace the adjustable control dripper by a control dripper with the same emitter discharge exponent (see Appendix) as the irrigation drippers.

**Method 1** for increasing the discharge of the irrigation drippers during the irrigation event.

The discharge of the irrigation drippers can be increased by using a fractional dripper (see the Unpowered Terracotta Irrigation Controller User Manual)

**Method 2** for increasing the discharge of the irrigation drippers during the irrigation event.

The discharge of the irrigation drippers can be increased by connecting additional terracotta pots to the original terracotta pot so that the water level is the same in all pots. With one additional pot the discharge is slightly more than doubled. With two additional pots the discharge is slightly more than trebled. Continuing in this way the discharge continues to increase.

One way of connecting the pots is to drill a small hole in the bottom of the pots and to use 4 mm rubber grommets, 4 mm barbed elbows and 4 mm tubing. The drain hole in the additional pots should be sealed.



With two additional pots the discharge during the irrigation event is slightly more than trebled.



The pots are connected by 4 mm tubing so that the water level is the same in all the pots.

## 4. Recommended drippers

All drippers used for the irrigation and the construction of the dripper assembly should have the same emitter discharge exponent (see Appendix). To be sure that all the drippers have the same emitter discharge exponent, it is preferable that all the drippers (including the dripper assembly) are the same.

In the case of dripline with all drippers the same, the following driplines are recommended.

Netafim Aries HWD 13 mm dripline, 0.30 m spacing, emitter discharge exponent 0.46, 8L/H (at 100kPa) for the dripper assembly (available on line from [Dural Irrigation](#)). The spacing between the drippers can be larger for the irrigation drippers.

Netafim Aries TWD 16 mm dripline, 0.15 m spacing, emitter discharge exponent 0.46, 2.8 L/H (at 100 kPa) for the dripper assembly. The spacing between the drippers can be larger for the irrigation drippers.

If you decide to use a combination of drippers for the irrigation application, the following recommendations will assist you in the construction of the dripper assembly.

### On line drippers

Netafim NPC button drippers 2 L/H, 4 L/H or 8 L/H (at 100 kPa), emitter discharge exponent 0.480 (available on line from [Dural Irrigation](#))

### Dripline

Netafim Aries HWD 13 mm dripline, 0.30 m spacing, emitter discharge exponent 0.46 (available on line from [Dural Irrigation](#))

Netafim Aries HWD 16 mm dripline, 0.30 m spacing, emitter discharge exponent 0.46 (available on line from [Land & Water Technology](#))

To construct the dripper assembly using either of these driplines, it is recommended that 8 L/H dripline is used to reduce the number of drippers needed to construct the dripper assembly.

All of the driplines in the Netafim Aries range have an emitter discharge exponent of 0.46 and so you can choose any Aries dripline for your irrigation application.

For some applications it may be difficult to source suitable drippers that have the same emitter discharge exponent. For example, Antelco Agri Drip Classic 8 L/H drippers have an emitter discharge exponent of 0.47 and the Antelco Agri Drip Classic 2 L/H drippers have an emitter discharge exponent of 0.49 (see Appendix). Suppose that a 2 L/H dripper is used as the control dripper and 8 L/H drippers are used for the irrigation drippers. The following table shows the ratio of the flow rate of the 2 drippers for various values of pressure.

Pressure kPa	Ratio of the flow rate of 8 L/H dripper to the flow rate of the 2 L/H dripper
25	4.34
50	4.29
100	4.23
200	4.17
400	4.12

In general, the ratio of the flow rate of two emitters with different emitter discharge exponents can be calculated by the following formula.

$$\frac{q_2}{q_1} = r \left( \frac{100}{p} \right)^{x_2 - x_1}$$

where  $q_2$  is the flow rate of the high flow emitter at 100 kPa

$q_1$  is the flow rate of the low flow emitters at 100 kPa

$r$  is the ratio of the high flow rate to the low flow rate at 100 kPa

$p$  is the pressure in kPa

$x_2$  is the emitter discharge exponent of the high flow emitter

$x_1$  is the emitter discharge exponent of the low flow emitter

This formula can be used to determine whether the variations in the ratio of the flow rates for different pressures are acceptable.



## 5. Examples

### Example 1

For this example there is one zone only and the irrigation drippers for the zone are 40 Netafim NPC 4 L/H button drippers. The dripper assembly has 20 Netafim NPC 8 L/H button drippers.



1. The header tank is an elevated wheelie bin with the top of the wheelie bin 1.3 metres above the irrigation drippers. A float valve ensures that the header tank is always full and so the lowest operational water level is a full tank.



2. The outlet from the header tank delivers water to the inlet of an Unpowered Terracotta Irrigation Controller. The outlet from the Unpowered Terracotta Irrigation Controller delivers water to a length of 25mm polypipe at the same level as the control dripper.



3. The dripper assembly has 20 Netafim NPC 8 L/H button drippers inserted in to a short length of 19mm polypipe. The dripper assembly is connected to the 25mm polypipe so that the drippers on the dripper assembly are at the same level as the control dripper.



4. An open pipe collects the water from the dripper assembly and delivers it via polypipe to the irrigation drippers below.



5. The irrigation drippers are 40 Netafim NPC 4 L/H button drippers



## Example 2


This example is used to obtain some preliminary results to test the following two claims in relation to the Omodei method.

Claim 1. Provided that the irrigation system is designed so that frictional head loss along each lateral is negligible, then a desired irrigation uniformity for the entire irrigation system can be achieved.

Claim 2. Provided that the control dripper on the Unpowered Terracotta Irrigation Controller has the same emitter discharge exponent as the irrigation drippers, the water discharged from each irrigation dripper during the irrigation event is independent of pressure.

The drippers used for this application (including the control dripper) are all Antelco Agri Drip Classic 8 L/H drippers (at 100 kPa). The water supply is from a mains water tap. The control dripper is at level 0, zone 1 has 2 drippers at level -1.74 m, and zone 2 has 3 drippers at level -2.77 m.

### Schematic diagram

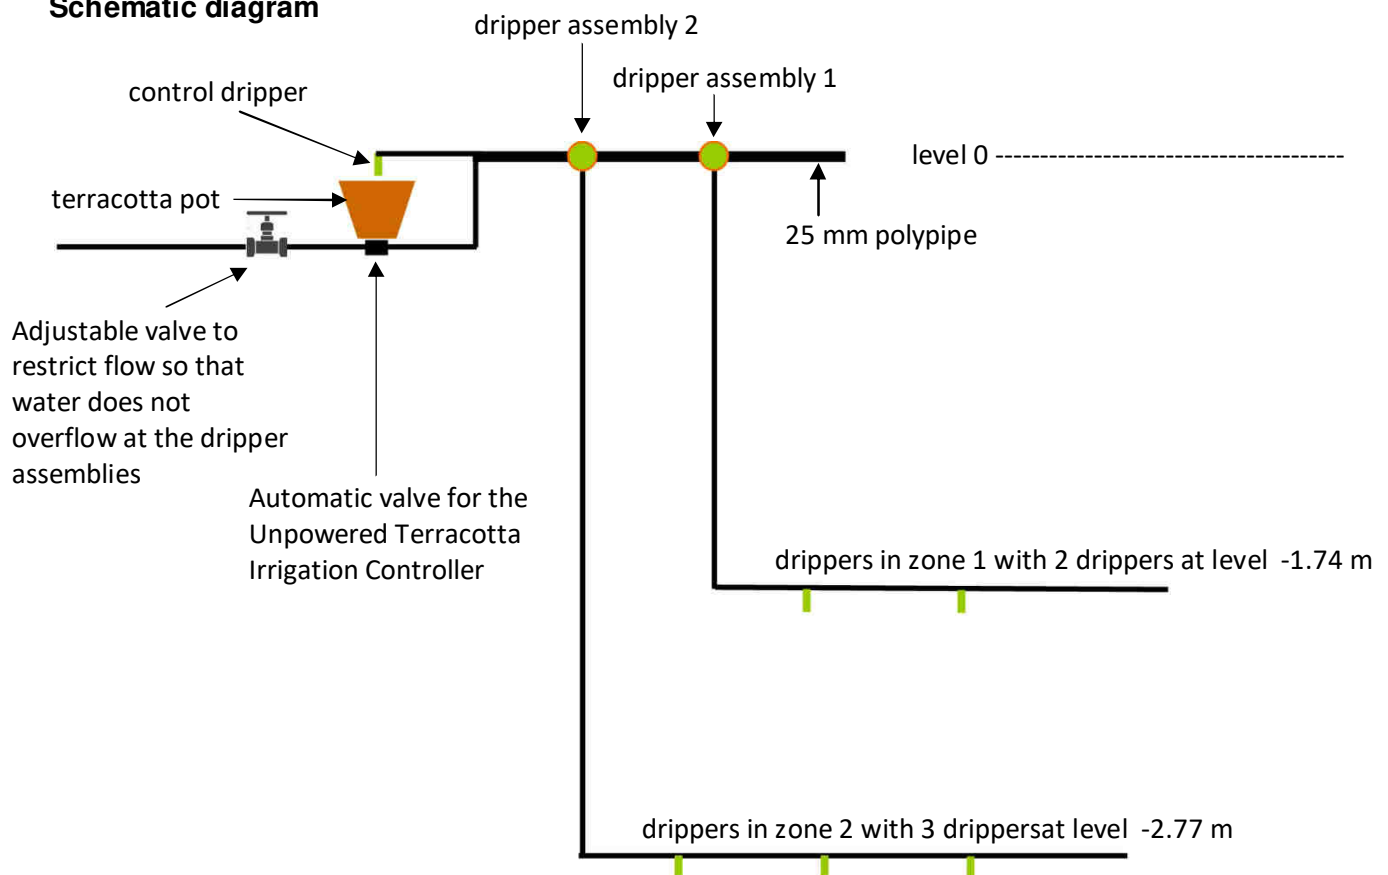

Zone 1 with 2 drippers at level -1.74 metres.



Zone 2 with 3 drippers at level -2.77 metres.



Dripper assemblies for zones 1 & 2 at level 0 on the roof. The drippers are open to the atmosphere.



The Unpowered Terracotta Irrigation Controller is at the top of the photo with the control dripper at level 0. The green hose delivers water at mains pressure to an adjustable valve connected to the inlet of the controller. Polypipe delivers water from the dripper assemblies to the corresponding zones.

## Results

	zone 1 dripper 1	zone 1 dripper 2	zone 2 dripper 1	zone 2 dripper 2	zone 2 dripper 3	SD	Mean	Coefficient of Variation	Uniformity
flow rate lph	2.240	2.230	2.210	2.160	2.210	0.0308	2.210	0.0139	0.986
discharge litres	0.307	0.314	0.315	0.326	0.322	0.0074	0.317	0.0233	0.977
pressure metres	0.830		0.750						
flow rate lph	1.642	1.635	1.747	1.785	1.777	0.0733	1.717	0.0427	0.957
discharge litres	0.301	0.303	0.338	0.320	0.314	0.0150	0.315	0.0475	0.953
pressure metres	0.460		0.500						
flow rate lph	1.230	1.267	1.133	1.148	1.288				
discharge litres	0.299	0.306	0.315	0.305	0.321	0.0087	0.309	0.0282	0.972
pressure metres	0.350		0.370						
flow rate lph	0.743	0.768	0.817	0.840	0.855	0.0476	0.805	0.0592	0.941
discharge litres	0.250	0.259	0.277	0.282	0.270	0.0131	0.268	0.0489	0.951
pressure metres	0.125		0.105						
discharge SD	0.026	0.025	0.025	0.020	0.025				
discharge Mean	0.289	0.296	0.311	0.308	0.307				
discharge CV	0.091	0.084	0.081	0.064	0.081				
discharge Uniformity	0.909	0.916	0.919	0.936	0.919				
<b>Discharge statistics when the lowest pressure is excluded</b>									
discharge SD	0.004	0.006	0.013	0.011	0.004				
discharge Mean	0.302	0.308	0.323	0.317	0.319				
discharge CV	0.014	0.018	0.041	0.034	0.014				
discharge Uniformity	0.986	0.982	0.959	0.966	0.986				

The results support both claims.

### Example 3

For this theoretical example the header tank is a 1000 litre IBC (Intermediate Bulk Container) with the outlet of the header tank 2.6 metres higher than the highest lateral. There are 10 irrigation zones on sloping ground with a 0.13 m vertical gap between successive zones. The irrigation application uses Netafim Aries dripline with 2 L/H NPC drippers. The dripper assembly for each zone uses Netafim Aries HWD 13 mm dripline with 8 L/H drippers.

The outlet from the header tank delivers water to an Unpowered Terracotta Irrigation Controller with the control dripper 1.3 m above the highest lateral ( $h = 1.3$  m). The outlet from the Unpowered Terracotta Irrigation Controller delivers water to a length of 25 mm polypipe at the same level as the control dripper.

The table below shows the number of 2 L/H drippers in each zone, and the number of 8 L/H drippers in each dripper assembly.

Zone number	Number of 2 L/H drippers in the zone	Number of 8 L/H drippers in the dripper assembly for the zone
1	100	25
2	80	20
3	80	20
4	88	22
5	104	26
6	100	25
7	92	23
8	60	15
9	80	20
10	80	20

Each dripper assembly is connected to the 25 mm polypipe and an open pipe collects the water from each dripper assembly and directs the water via 13 mm polypipe to the laterals in the corresponding zone.

For this irrigation application it is important that the discharge from each irrigation dripper is independent of the water level in the header tank. Therefore the adjustable control dripper on the Unpowered Terracotta Irrigation Controller has been replaced by a fractional dripper using 10 irrigation drippers (see the Unpowered Terracotta Irrigation Controller User Manual).

(.



Dripper assembly for zone 8 with 15 8 L/H drippers using Netafim Aries HWD 13 mm dripline



The dripper assembly is inserted inside an open pipe and is ready to be connected to the 25 mm polypipe.

## 6. Installation cost

The cost of installing the DIY drip irrigation system on sloping land from a header tank using the Omodei method is a fraction of the cost of installing an equivalent PC system.

- NPC drippers (or dripline) is less expensive than PC drippers (or dripline)
- A header tank does not normally provide enough pressure for PC drippers and so you need to purchase a high pressure pump.
- The pressure requirement for PC drippers means that hose clamps are usually required for barbed connectors. For a header tank and NPC drippers, hose clamps are not needed.
- The range of pressure compensation for a PC system means that many zones are often required. Each zone will require its own solenoid valve and the cost of the solenoid valves is likely to be significant. The DIY system is unpowered and so there are no solenoid valves.
- The PC system requires a conventional irrigation controller and electrical wiring to each of the solenoid valves. The DIY system requires an [Unpowered Terracotta Irrigation Controller](#) and hence no wiring.

## Appendix Emission discharge exponent

The Netafim Product Catalogue contains the following table for their button drippers.

### DRIPPERS TECHNICAL DATA

Button drippers

FLOW RATE* (L/H)	MAXIMUM WORKING PRESSURE (BAR)	WATER PASSAGES DIMENSIONS WIDTH-DEPTH-LENGTH (MM)	CONSTANT K	EXPONENT X	BASIS CODE COLOR	CAP COLOR CODE
2.00	2.0	0.98 x 0.89 x 50	0.662	0.48	Red	Black
3.00	2.0	1.05 x 0.95 x 50	0.993	0.48	Blue	Black
4.00	2.0	1.27 x 1.20 x 50	1.325	0.48	Black	Black
8.00	2.0	1.65 x 1.40 x 50	2.649	0.48	Green	Black

\*Flow rate at 1.0 bar pressure



**BUTTON DRIPPER  
3MM BARB OUTLET**


All of the button drippers have an emitter discharge exponent of 0.48.

If these drippers are used, the ratio of the flow rates of any two drippers is independent of pressure.



The Antelco Product Catalogue contains the following flow curve and table for their Agri Drip NPC drippers.

### Discharge Rate: Standard Drip Emitters

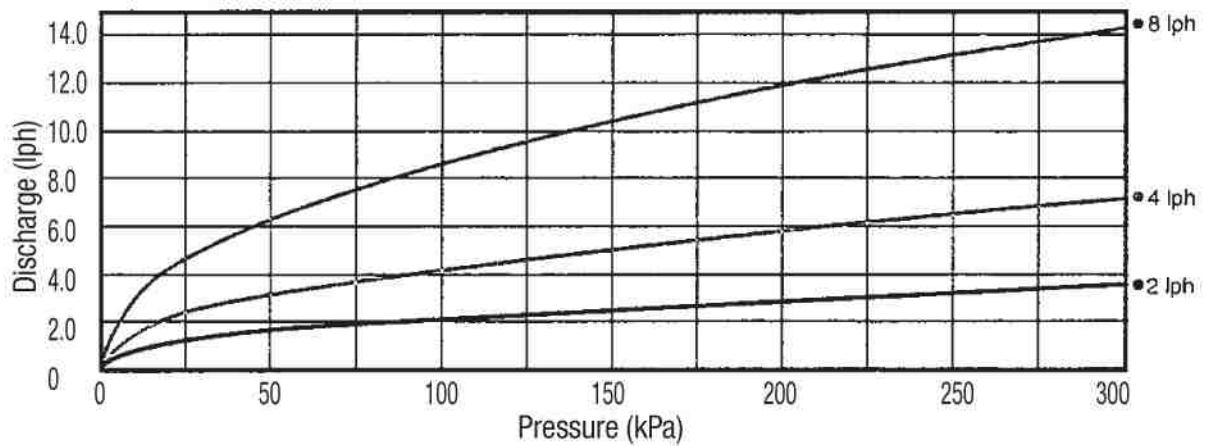

Performance		Standard		
		2 lph	4 lph	8 lph
Discharge (lph)	50 kPa	1.41	2.96	6.07
	75 kPa	1.73	3.58	7.35
	100 kPa	1.99	4.10	8.41
	125 kPa	2.22	4.56	9.34
Discharge = $K \times \text{Pressure}^X$	150 kPa	2.42	4.96	10.18
Coefficient of Variation – CV		2.0%	2.0%	2.5%
Constant – K		0.208	0.471	0.966
Exponent – X		0.490	0.470	0.470
Minimum Cross Section (mm)		0.90x0.71	1.28x0.82	1.85x1.09



Note that the red dripper has an emitter discharge exponent of 0.49 and the grey and green drippers have an emitter discharge exponent of 0.47. Therefore, if you use only grey and green drippers, the ratio of the flow rates of any two drippers is independent of pressure.